

Project Name:

Type:

Notes:

Catalog #: LED - 360° - 4'R3 - UNV - - RADC - - - - -

Extruded Aluminum Architectural and Task Lighting LED Luminaire for Use in Applications Including, but Not Limited to: Natatoriums, Subways, Parking Garages, Airports, and Office Spaces

Optics:

- Customizable Up, Down, Right and Left Light Distribution
- Wide 120° Beam Angle for Maximum Uniformity
- Near-Seamless Tandem Mounting Optional
- Diffusing Lenses Available in Clear and White

Mechanical:

- Extruded Aluminum Construction
- Stainless Steel Hardware
- Up to 360° of Light
- Anodized Brite-Dip Finish for Superior Corrosion Resistance
- Ambient Temperature: -40°C to 65.5°C (-40°F to 150°F)
- Polycarbonate Lenses Optional

Electrical:


- Input Voltage: 120-277V (347/480V consult factory)
- 0-10V Dimming Standard (1% Dimming Optional)

Listings:


- UL1598 for Damp Locations
- ARRA Compliant (Made In America)

Components:

- High-Output Nichia LED Chips
- 90°C Osram Sylvania LED Drivers

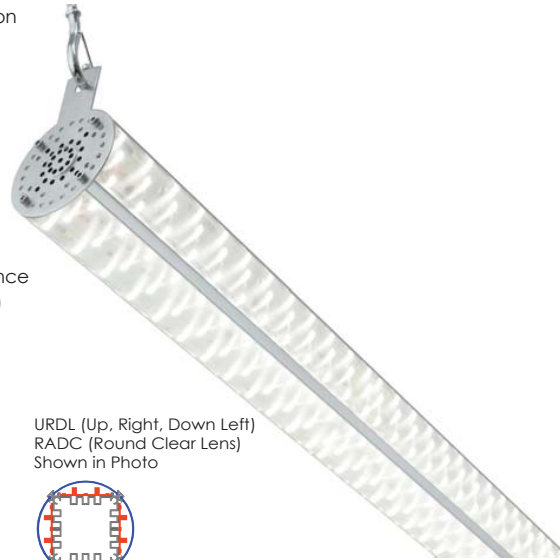

URDL (Up, Right, Down Left)
RADC (Round Clear Lens)
Shown in Photo



Standard Finish Includes (shown above):
-Brite-Dip Anodized Aluminum Extrusions
-Mill Finish Aluminum Endcaps

Warranty:

- Fixture Body: 10 Years
- Electronics: 5 Years

Performance:

- 7,189.8 Lumens
- 73.3 Watts
- 98.1 Lumens/Watt
- TM-21: L(70) > 60,000 Hours

Installation:

- Aircraft Cable Suspension
- Pendant Mount
- Surface Mount
- Wall Mount

Fixture Dimensions:

- 46.5" Length x 3" Diameter (118cm x 7.62cm)

Fixture Weight:

- 10 Lbs (4.54 kg)



If any options are not desired, leave blank.

LED	360°	4'R3	UNV	RADC			Optional Items							
Light Type	Fixture Type	Configuration	Driver Type	Direction of Light	Lens	Color Temperature	Option 1	Option 2	Option 3	Option 4	Option 5	Option 6	Option 7	Option 8
LED	360°	4'R3 4' Fixture Round Lens 3-Side Illuminated	UNV 120-277 Volts	U - Up R - Right D - Down L - Left	RADC Round Acrylic Diffused Clear	850 - 80CRI / 5000k 840 - 80CRI / 4000k 835 - 80CRI / 3500k								
*Other Voltages Available - Contact Factory			* See Check Boxes Below											
Lens Configuration Check Boxes Below for Desired Lens Option						Cord Options C3/10 3-Wire Cord / 10' Length C4/10 4-Wire Cord / 10' Length C5/10 5-Wire Cord / 10' Length C6/10 6-Wire Cord / 10' Length C3/15 3-Wire Cord / 15' Length C4/15 4-Wire Cord / 15' Length C5/15 5-Wire Cord / 15' Length C6/15 6-Wire Cord / 15' Length								
Clear Round (RADC) (Shown in Photo) U R D L White Round (RADW) U R D L Clear Square (SADC) U R D L White Square (SADW) U R D L						Mounting Options CS 5' 5' Aircraft Cable CS 10' 10' Aircraft Cable CS 5'-SS 5' Stainless Steel Aircraft Cable CS 10'-SS 10' Stainless Steel Aircraft Cable CM Ceiling Mount WM Wall Mount PM Pendant Mount - CONTACT FACTORY								
*Other CCT and CRI Available upon Request: Contact Factory for Availability						Emergency Lighting Options EM10 Provides Fixture with Approx. 1150 Lumens for 90 Minutes EM12 Provides Fixture with Approx. 1400 Lumens for 90 Minutes								
						Controls Options 1% 1% Dimming for Larger Control Range DLH Daylight Harvesting Sensor (0-10V) OCC Occupancy Sensor (On/Off) D/O Daylight and OCC in Single Module (0-10V) WCM Wireless Control Module - Contact Factory								
						Customization Options TMB Tandem Mount - Continuous Runs with Through-Wiring REM Remotely Mounted Electronics Compartment								
						Fixture Finish Options STND Standard Finish - As Shown in Photo Above CC#### Custom Color: Please Provide RAL Number (ex: CC362B) NAT Natatorium Grade Finish: White								