

Option/Adder Data

Contact factory for detailed specification sheets on each option/adder. Every option/adder available in 347/480V, contact factory.

| | | | | | | | |
|---|---------------------|---|-----------------|----------------------------------|------------------|--------------------------------|---------------|
| Daylight Harvesting & Occupancy Sensor - Dim | | Daylight Harvesting Sensor - Dim | | Occupancy Sensor - On/Off | | Wireless Control Module | |
| Control Type | PIR/Photocell 1-10V | Control Type | Photocell 1-10V | Control Type | PIR Line Voltage | Quantity Needed Per Fixture | 1 |
| Ambient Temperature | 5°C to 55°C | Ambient Temperature | 5°C to 55°C | Ambient Temperature | -10°C to 71°C | Ambient Temperature | -40°C to 55°C |
| Mounting Height | 8' to 40' | Mounting Height | 8' to 40' | Mounting Height | 15' to 45' | Phone Application | Available |


| | |
|------------------------------------|---------------------|
| Emergency Battery (12-Watt) | |
| Initial Lumen Output | 1626 Lumens Per Bar |
| Ambient Temperature | 0°C to 55°C |
| Illumination Time | 90 Minutes |

| | |
|------------------------------------|---------------------|
| Emergency Battery (10-Watt) | |
| Initial Lumen Output | 1355 Lumens Per Bar |
| Ambient Temperature | 0°C to 55°C |
| Illumination Time | 90 Minutes |


| | |
|--|----------------|
| 347/480Volt Step-Down Transformer | |
| Quantity Needed Per Fixture | 1 |
| Ambient Temperature | -40°C to 100°C |

TEST #: LLI-17186-11
 TEST LAB: LIGHTLAB INTERNATIONAL (WWW.LIGHTLABINT.COM)
 CATALOG: LUX-1K10-4-D-HO2-850-4'-U10-CA'
 INPUT WATTAGE: 361.8
 MAX CD: 13,392.7 AT HORIZONTAL: 22.5°, VERTICAL: 1°

Polar Candela Distribution

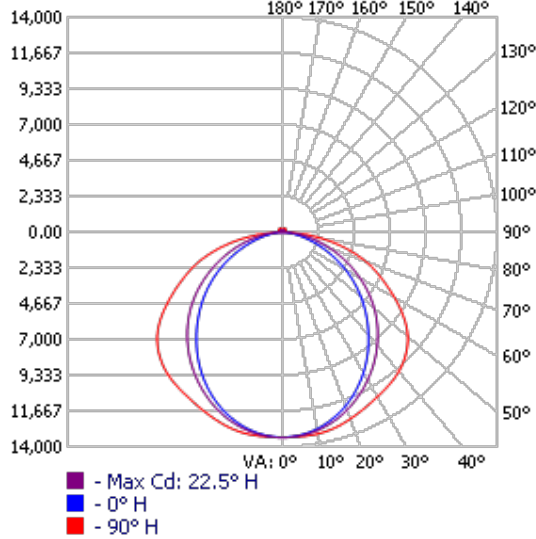


Isofootcandle Plot

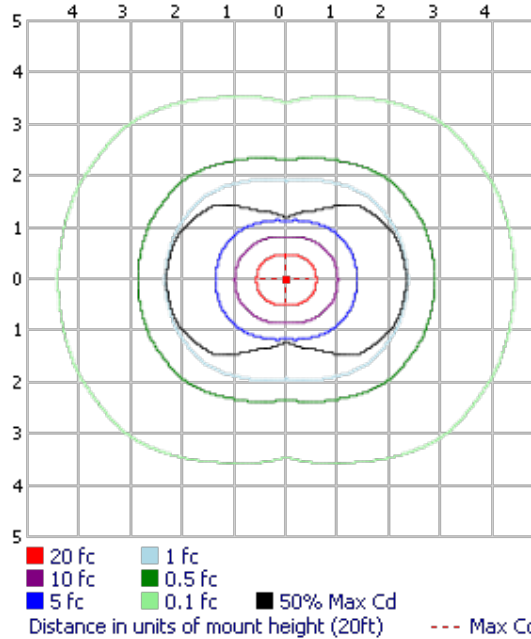

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | % LUMINAIRE |
|--------|----------|-------------|
| 0-30 | 10,541.6 | 24.1% |
| 0-40 | 17,525.6 | 40% |
| 0-60 | 32,435.9 | 74% |
| 60-90 | 10,566.8 | 24.1% |
| 70-100 | 4,801.2 | 11% |
| 90-120 | 276.0 | 0.6% |
| 0-90 | 43,002.6 | 98.2% |
| 90-180 | 802.2 | 1.8% |
| 0-180 | 43,804.8 | 100% |

LCS Graph

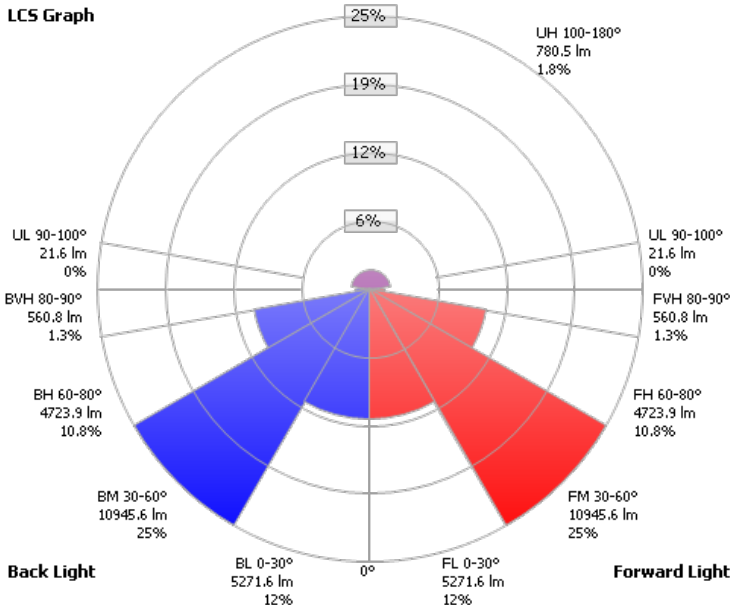

LCS TABLE

| BUG RATING | B5 - U4 - G4 | |
|-------------------|--------------|----------|
| FORWARD LIGHT | LUMENS | LUMENS % |
| LOW(0-30): | 5,271.6 | 12% |
| MEDIUM(30-60): | 10,945.6 | 25% |
| HIGH(60-80): | 4,723.9 | 10.8% |
| VERY HIGH(80-90): | 560.8 | 1.3% |
| BACK LIGHT | | |
| LOW(0-30): | 5,271.6 | 12% |
| MEDIUM(30-60): | 10,945.6 | 25% |
| HIGH(60-80): | 4,723.9 | 10.8% |
| VERY HIGH(80-90): | 560.8 | 1.3% |
| UPLIGHT | | |
| LOW(90-100): | 21.6 | 0% |
| HIGH(100-180): | 780.5 | 1.8% |
| TRAPPED LIGHT: | 0.000 | 0% |

Scale = Max LCS %

Trapped Light: 0lm, 0%

