



**OUTDOOR PHOTOMETRIC REPORT**  
CATALOG: DATA-8-24LM-ST-840-U10-SM-CA

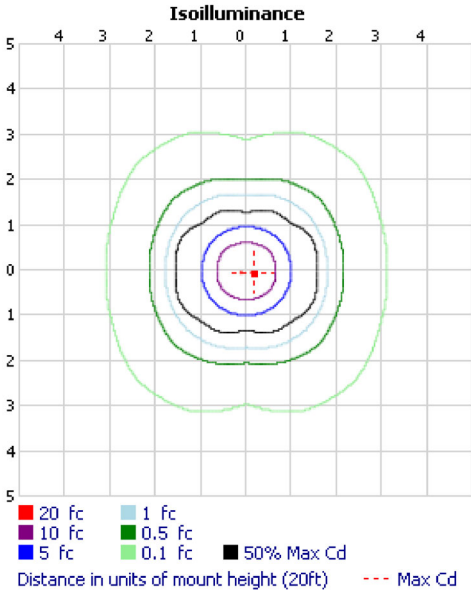

Manufacturer: LUX Dynamics  
Test #: n/a  
Test Lab: LIGHT LABORATORY, INC. (www.lightlaboratory.com)  
Catalog: DATA-8-24lm-ST-840-U10-SM-CA  
Description: LED luminaire  
Lamp Output: Total luminaire Lumens: 24320.5, absolute photometry \*  
Ballast / Driver: XI085C240V054BST1 / 2  
Input Wattage: 166  
Luminous Opening: Rectangle w/Luminous Sides (L: 89.04", W: 2.52", H: 0.96")  
Max Cd: 8,365.7 at Horizontal: 67.5°, Vertical: 10°  
Roadway Class: Type VS

No  
Photo  
Available

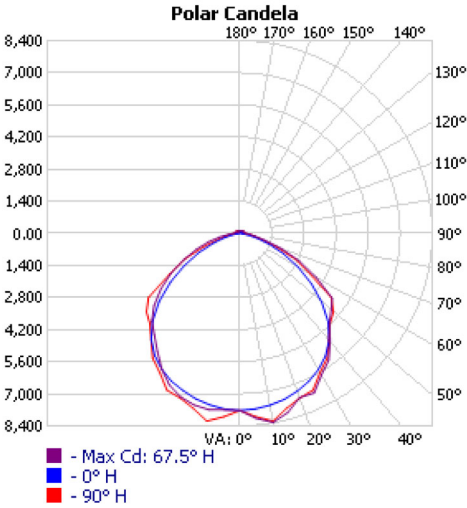

\*Test based on absolute photometry where lamp lumens=lumens total.  
\*Cutoff Classification and efficiency cannot be properly calculated for absolute photometry.

Visual Photometric Tool 1.2.46 copyright 2025, Acuity Brands Lighting.  
This Photometric report has been generated using methods recommended by the IESNA. Calculations are based on Photometric data provided by the manufacturer, and the accuracy of this Photometric report is dependent on the accuracy of the data provided. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual Photometric performance to differ from the performance calculated using the data provided by the manufacturer. This report is provided without warranty as to accuracy, completeness, reliability or otherwise. In no event will Acuity Brands Lighting be responsible for any loss resulting from any use of this report.



OUTDOOR PHOTOMETRIC REPORT  
CATALOG: DATA-8-24LM-ST-840-U10-SM-CA



Zonal Lumen Summary

| Zone   | Lumens   | % Luminaire |
|--------|----------|-------------|
| 0-30   | 6,384.5  | 26.3%       |
| 0-40   | 10,515.4 | 43.2%       |
| 0-60   | 18,690.6 | 76.9%       |
| 60-90  | 4,645.7  | 19.1%       |
| 70-100 | 2,113.5  | 8.7%        |
| 90-120 | 602.0    | 2.5%        |
| 0-90   | 23,336.3 | 96%         |
| 90-180 | 984.1    | 4%          |
| 0-180  | 24,320.5 | 100%        |

Lumens Per Zone

| Zone  | Lumens  | % Total | Zone    | Lumens | % Total |
|-------|---------|---------|---------|--------|---------|
| 0-10  | 760.7   | 3.1%    | 90-100  | 235.7  | 1%      |
| 10-20 | 2,226.1 | 9.2%    | 100-110 | 194.9  | 0.8%    |
| 20-30 | 3,397.7 | 14.0%   | 110-120 | 171.4  | 0.7%    |
| 30-40 | 4,130.9 | 17.0%   | 120-130 | 132.4  | 0.5%    |
| 40-50 | 4,271.7 | 17.6%   | 130-140 | 91.7   | 0.4%    |
| 50-60 | 3,903.5 | 16.1%   | 140-150 | 66.6   | 0.3%    |
| 60-70 | 2,768.0 | 11.4%   | 150-160 | 49.2   | 0.2%    |
| 70-80 | 1,364.1 | 5.6%    | 160-170 | 31.5   | 0.1%    |
| 80-90 | 513.7   | 2.1%    | 170-180 | 10.8   | 0%      |

Roadway Summary

|                        |                |
|------------------------|----------------|
| Distribution:          | Type VS        |
| Max Cd, 90 Deg Vert:   | 348.5          |
| Max Cd, 80 to <90 Deg: | 946.9          |
|                        | Lumens % Lamp  |
| Downward Street Side:  | 11,739.2 48.3% |
| Downward House Side:   | 11,605.8 47.7% |
| Downward Total:        | 23,345.0 96%   |
| Upward Street Side:    | 494.4 2%       |
| Upward House Side:     | 489.6 2%       |
| Upward Total:          | 984.0 4%       |
| Total Lumens:          | 24,329.0 100%  |

LCS Table


| BUG Rating        | B4 - U4 - G3 |          |
|-------------------|--------------|----------|
| Forward Light     | Lumens       | Lumens % |
| Low(0-30):        | 3,200.3      | 13.2%    |
| Medium(30-60):    | 6,186.2      | 25.4%    |
| High(60-80):      | 2,092.7      | 8.6%     |
| Very High(80-90): | 260.0        | 1.1%     |
| Back Light        |              |          |
| Low(0-30):        | 3,185.5      | 13.1%    |
| Medium(30-60):    | 6,125.1      | 25.2%    |
| High(60-80):      | 2,041.4      | 8.4%     |
| Very High(80-90): | 253.7        | 1%       |
| Uplight           |              |          |
| Low(90-100):      | 235.7        | 1%       |
| High(100-180):    | 748.3        | 3.1%     |
| Trapped Light:    | 0.000        | 0%       |



**OUTDOOR PHOTOMETRIC REPORT**  
CATALOG: DATA-8-24LM-ST-840-U10-SM-CA



**LCS Graph**

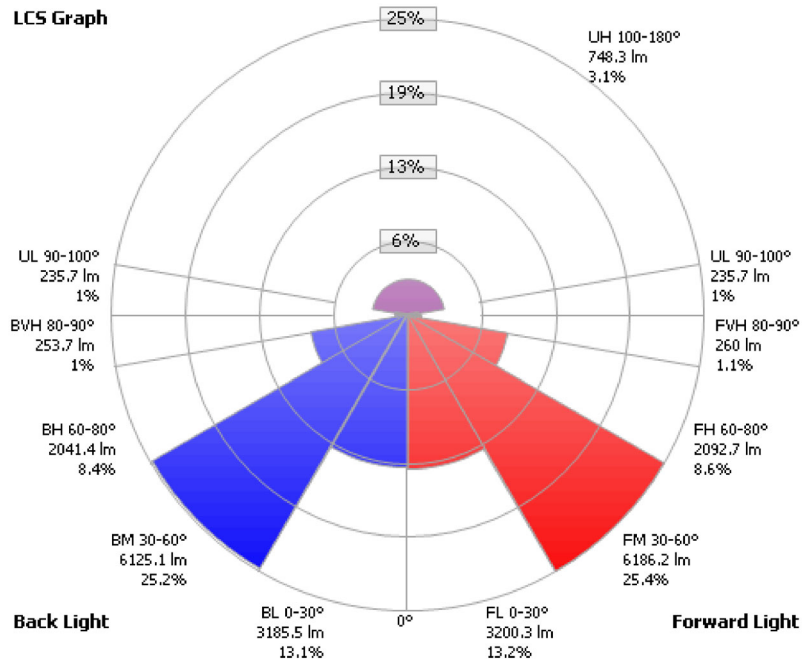

Scale = Max LCS %

Trapped Light: 0 lm, 0%



Candela Table - Type C

|     |      |      |      |      |      |       |      |       |      |
|-----|------|------|------|------|------|-------|------|-------|------|
|     | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  |
| 0   | 7723 | 7723 | 7723 | 7723 | 7723 | 7723  | 7723 | 7723  | 7723 |
| 5   | 7684 | 7742 | 7998 | 8089 | 8024 | 8082  | 7998 | 7723  | 7687 |
| 10  | 7602 | 7827 | 8134 | 8366 | 8306 | 8352  | 8123 | 7808  | 7589 |
| 15  | 7490 | 7767 | 8204 | 8082 | 7893 | 8056  | 8160 | 7740  | 7468 |
| 20  | 7322 | 7642 | 7800 | 7618 | 7636 | 7594  | 7728 | 7585  | 7286 |
| 25  | 7118 | 7370 | 7295 | 7674 | 7541 | 7653  | 7234 | 7291  | 7101 |
| 30  | 6853 | 6907 | 7293 | 7128 | 6999 | 7111  | 7198 | 6827  | 6831 |
| 35  | 6514 | 6366 | 6946 | 6752 | 6644 | 6732  | 6914 | 6280  | 6494 |
| 40  | 6064 | 5892 | 6298 | 6117 | 6035 | 6089  | 6278 | 5811  | 6028 |
| 45  | 5443 | 5520 | 5676 | 5530 | 5562 | 5500  | 5634 | 5440  | 5386 |
| 50  | 4660 | 4996 | 4899 | 5195 | 5328 | 5149  | 4865 | 4893  | 4595 |
| 55  | 3800 | 4315 | 4296 | 4915 | 4869 | 4879  | 4204 | 4204  | 3698 |
| 60  | 2927 | 3580 | 3939 | 3861 | 3534 | 3816  | 3844 | 3480  | 2814 |
| 65  | 2101 | 2800 | 3315 | 2868 | 2676 | 2844  | 3267 | 2705  | 1986 |
| 70  | 1357 | 2108 | 2402 | 1921 | 1683 | 1897  | 2348 | 2011  | 1253 |
| 75  | 755  | 1498 | 1588 | 1102 | 933  | 1085  | 1547 | 1428  | 687  |
| 80  | 366  | 940  | 947  | 648  | 612  | 639   | 923  | 899   | 326  |
| 85  | 141  | 505  | 554  | 435  | 408  | 430   | 544  | 490   | 122  |
| 90  | 61   | 292  | 348  | 279  | 250  | 277   | 343  | 287   | 60   |
| 95  | 66   | 219  | 260  | 214  | 196  | 216   | 260  | 221   | 63   |
| 100 | 76   | 185  | 226  | 194  | 180  | 196   | 230  | 185   | 73   |
| 105 | 90   | 199  | 218  | 190  | 178  | 192   | 219  | 197   | 87   |
| 110 | 107  | 204  | 201  | 187  | 180  | 185   | 201  | 197   | 100  |
| 115 | 112  | 185  | 201  | 172  | 170  | 172   | 199  | 178   | 100  |
| 120 | 105  | 162  | 187  | 170  | 168  | 170   | 185  | 153   | 95   |
| 125 | 97   | 138  | 160  | 167  | 167  | 168   | 158  | 134   | 85   |
| 130 | 83   | 110  | 138  | 158  | 162  | 158   | 136  | 109   | 75   |
| 135 | 71   | 95   | 119  | 143  | 150  | 143   | 119  | 94    | 63   |
| 140 | 73   | 87   | 112  | 131  | 138  | 131   | 112  | 87    | 66   |
| 145 | 80   | 88   | 107  | 122  | 128  | 122   | 109  | 88    | 70   |
| 150 | 87   | 92   | 107  | 119  | 124  | 119   | 107  | 94    | 80   |
| 155 | 94   | 97   | 107  | 116  | 119  | 116   | 107  | 95    | 87   |
| 160 | 100  | 105  | 109  | 116  | 117  | 114   | 107  | 104   | 94   |
| 165 | 105  | 112  | 110  | 117  | 117  | 116   | 109  | 109   | 100  |
| 170 | 110  | 109  | 119  | 117  | 119  | 114   | 116  | 107   | 107  |
| 175 | 117  | 109  | 109  | 117  | 119  | 114   | 109  | 107   | 114  |
| 180 | 114  | 114  | 114  | 114  | 114  | 114   | 114  | 114   | 114  |

